


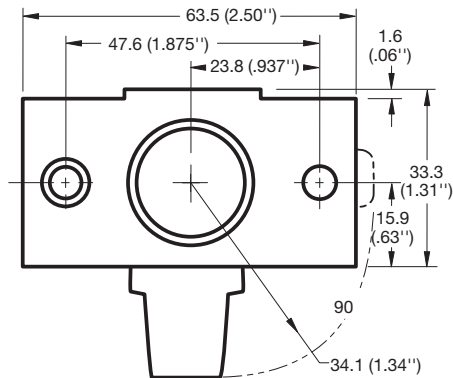
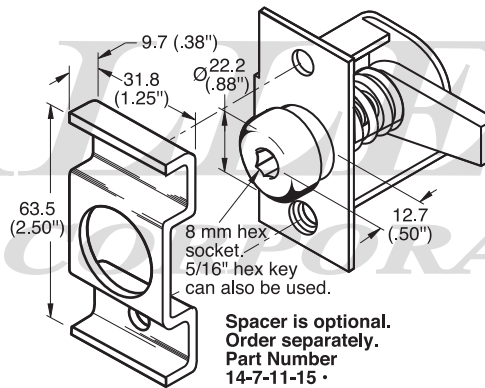
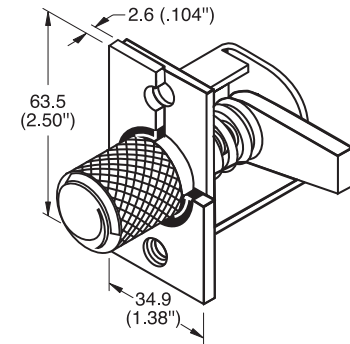


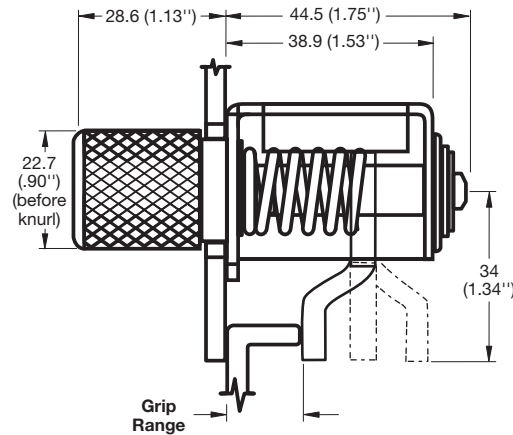

turn clockwise to latch

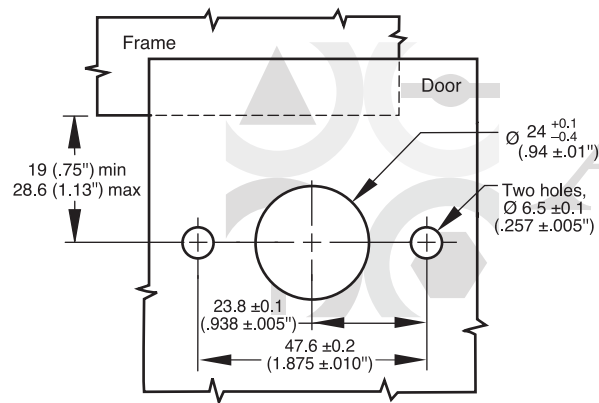

Spacer is optional.
Order separately.
Part Number
14-7-11-15

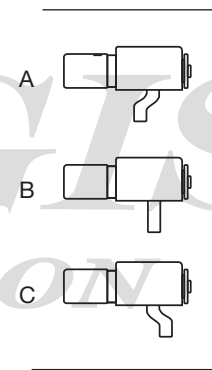

Pawl Position
(Pre-assembled) determines
grip range (see table)

Style	Grip Range		Part Number	Pawl Position
	Min.	Max.		
Knurled Head	0 (0")	19 (.75")	14-10-11-11	A
	10 (.39")	31 (1.22")	14-10-13-11	B
	23 (.91")	42 (1.65")	14-10-14-11	C
Hex-Socket Head	0 (0")	19 (.75")	14-10-91-11	A
	10 (.39")	31 (1.22")	14-10-93-11	B
	23 (.91")	42 (1.65")	14-10-94-11	C
Slotted Flush Head	0 (0")	19 (.75")	14-10-71-11	A
	10 (.39")	31 (1.22")	14-10-73-11	B
	23 (.91")	42 (1.65")	14-10-74-11	C

www.ALLEGISCORP.com
1-866-378-7550

MATERIAL / FINISH :
Zinc Plated w/ Chromate plus sealer

REV. :

1 : 1

DATE :

4-10-2018

DESCRIPTION :

Compression Latch

DRAWING NO. :

See Chart