


APPROVAL - CUSTOMER NAME & SIGNATURE


DATE

REV.	DATE	DRAWN	REVISION	ITEM	PART NUMBER	MATERIAL	FINISH
J	05MAR93	VTB	PRN: S-1-03	ASSEMBLY	69-10-501-11	-	-
K	15JUL2000	JCK	PRN: 69-101	KNOB	-	NYLON	BLACK
L	20MAR2019	CMS/LT	PRN: P2019-0738	SHAFT	-	STEEL	DACROSEALED
				WASHER*	-	STAINLESS STEEL	PASSIVATE
				SPRING*	-	STAINLESS STEEL	NATURAL
				SLEEVE	-	DIE CAST ZINC	CHEMICAL PROTECTIVE FILM
				GROOVE PIN	-	STAINLESS STEEL	NATURAL
				FERRULE	-	6061-T6 ALUMINUM	NATURAL
				SLEEVE NUT	-	LOW CARBON STEEL	DACROTIZED™
				SHAFT NUT (2)	-	LOW CARBON STEEL	DACROTIZED™
				PAWL	-	1010 STEEL	DACROTIZED™
				LOCK WASHER (2)	-	SPRING STEEL	DACROTIZED™

*WASHER AND SPRING ARE INTERNAL COMPONENTS, NOT SHOWN

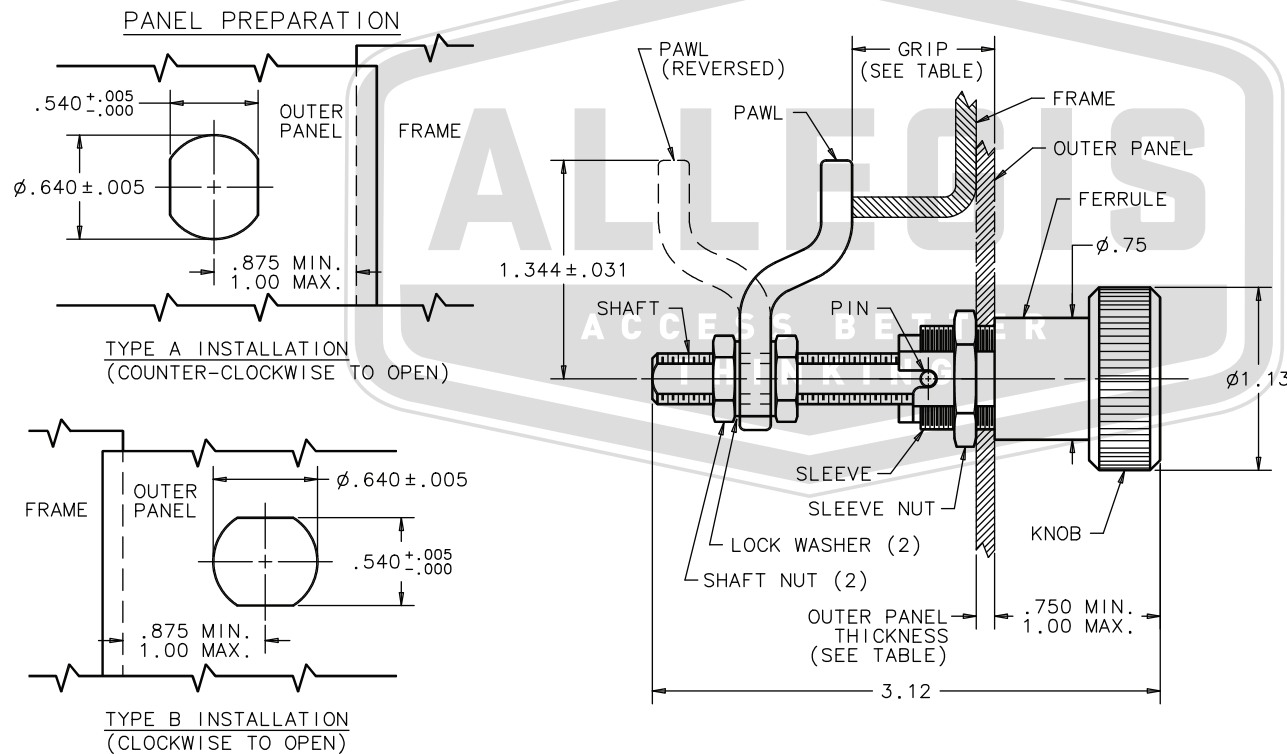

FASTENER OPERATES THRU 90° ROTATION IN DIRECTION AS SHOWN WITH A POSITIVE CLICK STOP AT BOTH EXTREMES. PAWL PULLS UP APPROX. .047 AT BOTH EXTREMES.



KNOB HEIGHT FROM OUTSIDE SURFACE OF PANEL IS ADJUSTABLE FROM .750 MIN. TO 1.00 MAX. BY ADJUSTING POSITION OF FERRULE ON THREADED SLEEVE BEFORE INSTALLING FASTENER. MAX. OUTER PANEL THICKNESS AND GRIP RANGE ARE DEPENDENT UPON SPECIFIC KNOB HEIGHT SELECTED (SEE TABLE).

™METAL COATINGS INTL.

ALLEGIS	1-866-378-7550
MATERIAL: Plastic	DRAWING NO. : 69-10-501-11
FINISH:	
REV.: 1:1	DATE: 5/29/2019