

APPROVAL - CUSTOMER NAME & SIGNATURE

DATE

REV.	DATE	BY-CHKD	REVISIONS	PART NUMBER	MATERIAL	PART NUMBER	MATERIAL	PANEL THICKNESS
A	05MAR2009	ACH MJS	PRN: P2009-0274	P1-30-101-XX	ABS,UL94-HB	P1-31	ABS,UL94-V0	1 MIN.-1.8 MAX.
B	16NOV2017	CMS JW	PRN: P2017-2676	P1-30-103-XX	ABS,UL94-HB	P1-33	ABS,UL94-V0	1.8 MIN.-3.3 MAX.
				P1-30-105-XX	ABS,UL94-HB	P1-35	ABS,UL94-V0	3.3 MIN.-4.8 MAX.
				P1-30-107-XX	ABS,UL94-HB	P1-37	ABS,UL94-V0	4.8 MIN.-6.3 MAX.

PART NUMBER LEGEND

-XX EQUALS COLOR OF ABS MATERIAL.
 -03 = MEDIUM GRAY
 -04 = LIGHT GRAY
 -11 = BLACK
 -30 = KODAK IMAGE LIGHT GRAY


NOTE: ADD THE ABOVE -XX NUMBER TO
 THE ABS, UL94-V0 MATERIAL PART No.
 FOR ANY COLORS OTHER THAN BLACK.

MATERIAL AND FINISH

LIFT AND CUP - SEE ABOVE TABLE
 MOUNTING SCREWS - STEEL, ZINC PLATED
 PLUS BRIGHT CHROMATE DIP.

INSTALLATION INSTRUCTIONS

1. PREPARE A RECTANGULAR HOLE AS SHOWN.
2. INSERT LIFT INTO THE PANEL, SEATING THE SLOT AGAINST THE TOP OPENING.
3. ATTACH THE CUP TO THE BACK OF THE LIFT AND PANEL USING THE SUPPLIED MOUNTING SCREWS.
4. MAX RECOMMENDED SCREW TIGHTENING TORQUE IS 0.56 N-m [5 in-lbf].

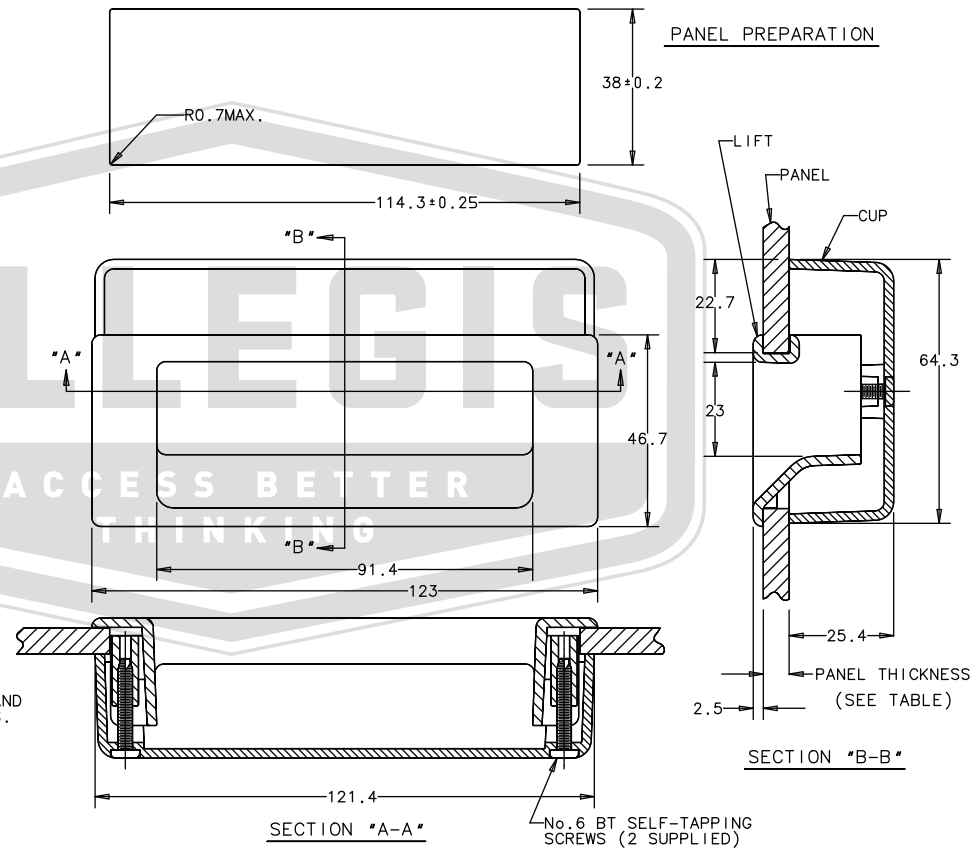

ALL DIMENSIONS ARE IN MILLIMETERS.
 ALL DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE.
 THIRD ANGLE PROJECTION DRAWING.

ALLEGIS

1-866-378-7550

MATERIAL:

ABS Plastic

DRAWING NO.:

P1-30-103-11

FINISH:

REV.:

1:1

DATE:

5/30/2019